





側溝本体（基本型）

● 寸法図

正面図



側面図

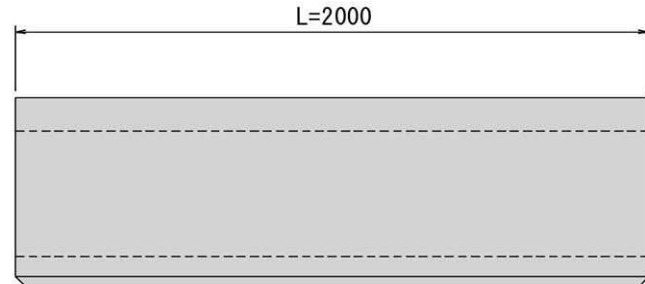


● 諸元表

呼び名	参考重量 (kg)	寸法 (mm)										
		A	B	H	a	b	c	d	e1	e2	f	t
250 × 250	305	360	320	400	250	250	255	50	55	55	65	80
300 × 300	378	420	380	455	300	300	305	55	60	60	70	80
× 400	451	420	380	560	300	280	405	55	60	70	75	80
× 500	532	420	380	665	300	270	505	55	60	75	80	80
× 600	620	420	380	765	300	260	605	55	60	80	80	80
400 × 400	527	530	490	575	400	400	405	60	65	65	80	90
× 500	590	530	490	675	400	400	505	60	65	65	80	90
500 × 500	704	650	610	690	500	500	505	60	75	75	85	100
× 600	800	650	610	790	500	480	605	60	75	85	85	100
600 × 600	882	760	720	819	600	600	605	60	80	80	90	124


側溝蓋

● 寸法図

平面図



正面図



● 諸元表


呼び名	参考重量 (kg)	寸法 (mm)		
		B	b	t
250用	25	254	249	80
300用	30	304	299	80
400用	45	404	399	90
500用	65	524	519	100
600用	97	634	628	124

集水蓋


● 寸法図

【 250～300用 】

平面図

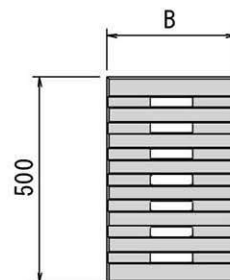


正面図




【 400～600用 】

平面図



正面図



● 諸元表


呼び名	参考重量 (kg)	寸法 (mm)			
		B	b	t	t1
250用	17	254	249	80	50
300用	19	304	299	80	50
400用	37	404	399	90	70
500用	41	524	519	100	75
600用	60	634	628	124	85




グレーチングタイプ 側溝本体（ボルト固定式）

● 寸法図


正面図

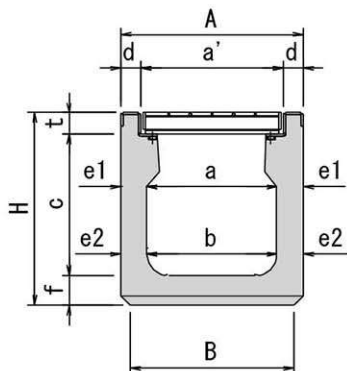


側面図

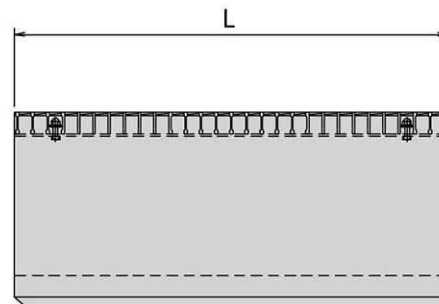

ボルト固定部詳細図



グレーチング平面図

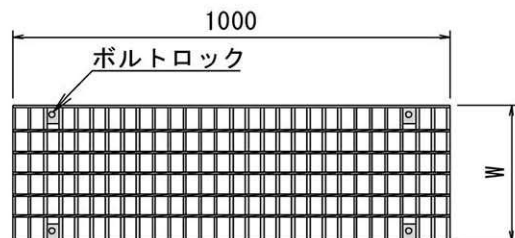


● 諸元表

呼び名	参考重量 (kg)		寸法 (mm)											
	L=1000	L=2000	A	B	H	a	a'	b	c	d	e1	e2	f	t
300×300	189	378	420	380	455	300	330	300	335	45	60	60	70	50
400×400	265	527	530	490	575	400	430	400	435	50	65	65	80	60


柵タイプ 側溝本体（グレーチング付・ボルト固定式）

● 寸法図

正面図

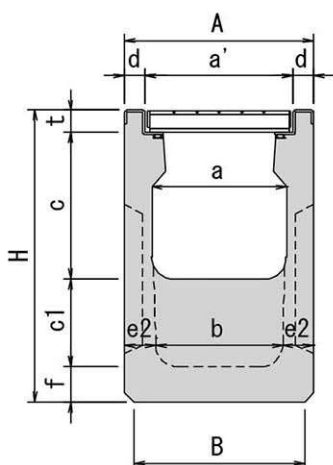

側面図

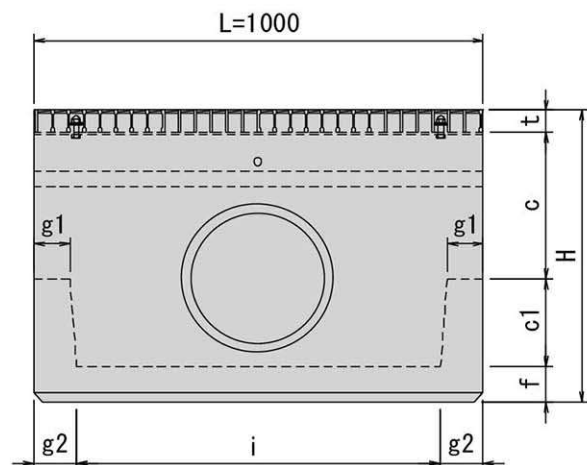

● 諸元表


呼び名	参考重量 (kg)	寸法 (mm)														
		A	B	H	a	a'	b	c	c1	d	e2	f	g1	g2	i	t
300×300	293	420	380	665	300	330	283	335	200	45	69	80	80	95	810	50
300×400	336	420	380	765	300	330	262	435	200	45	79	80	80	95	810	50
300×500	389	420	380	875	300	330	245	535	200	45	88	90	80	95	810	50




迂回タイプ 側溝本体

● 寸法図

正面図

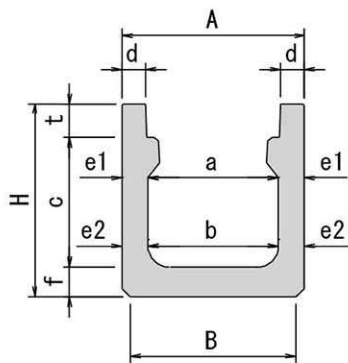

平面図

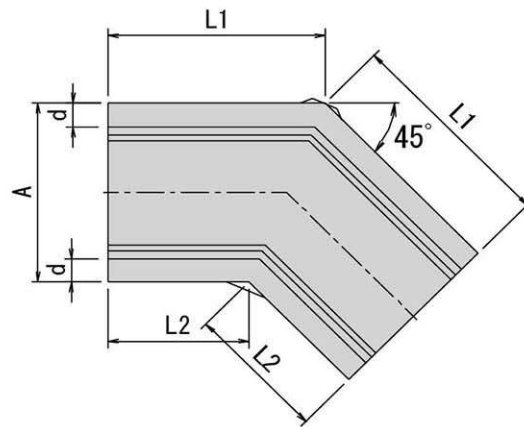


● 諸元表

呼び名	参考重量 (kg)	寸法 (mm)												
		A	B	H	L1	L2	a	b	c	d	e1	e2	f	t
300×300	156	420	380	455	499	325	300	300	305	55	60	60	70	80


迂回タイプ 側溝蓋

● 寸法図

正面図



平面図

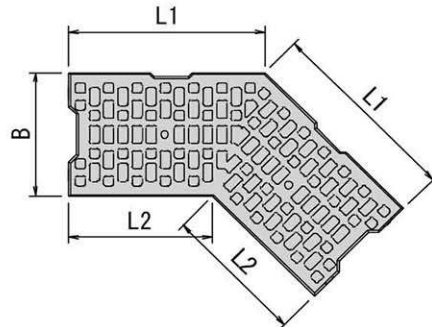


● 諸元表

呼び名	参考重量 (kg)	寸法 (mm)				
		B	b	L1	L2	t
300用	49	304	299	471	345	80


排水性舗装対応製品

● 寸法図

正面図

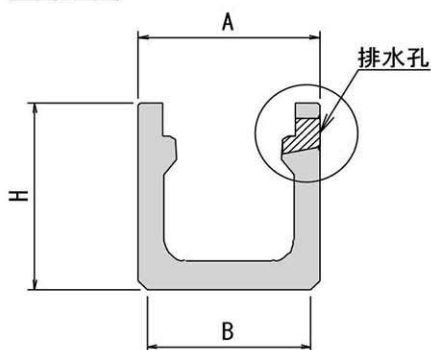


側面図

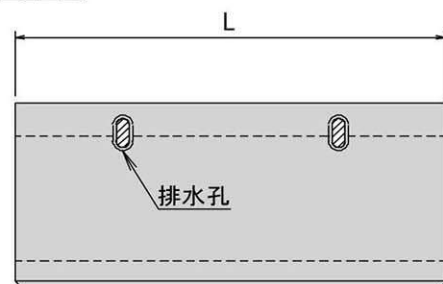


排水孔部拡大図

正面図



側面図







側溝本体（基本型）

● 寸法図

正面図

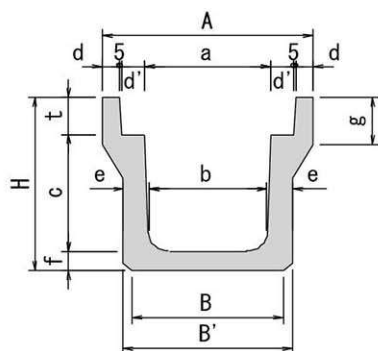

側面図

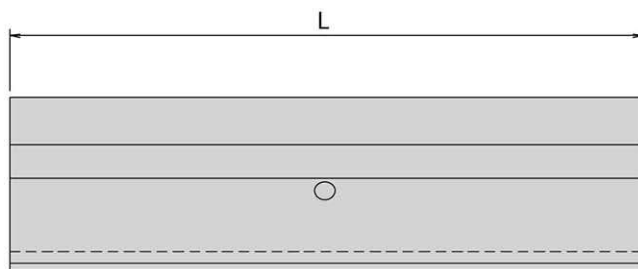


● 諸元表

呼び名	参考重量(kg)		寸法 (mm)												
	L=1000	L=2000	A	B	B'	H	a	b	c	d	d'	e	f	g	t
250	141	282	450	300	340	390	250	230	250	40	55	55	50	120	90
300A	164	329	500	360	400	445	300	280	300	40	55	60	50	120	95
300B	200	401	500	360	400	550	300	270	400	40	55	65	55	120	95
300C	238	477	500	360	400	655	300	260	500	40	55	70	60	120	95
400A	216	433	600	460	500	565	400	370	400	40	55	65	55	135	110
400B	256	512	600	460	500	670	400	360	500	40	55	70	60	135	110
500A	282	565	720	560	600	685	500	460	500	45	60	70	60	150	125
500B	325	651	720	560	600	790	500	450	600	45	60	75	65	150	125


側溝蓋（1種）

● 寸法図

平面図

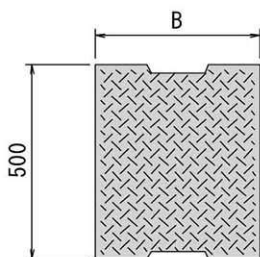

正面図



● 諸元表


呼び名	参考重量(kg)	寸法 (mm)				
		B	b	t	t1	t2
250用	29	362	50	90	55	35
300用	33	412	51	95	55	40
400用	47	512	51	110	65	45
500用	65	622	56	125	75	50




側溝本体(基本型)

● 寸法図

正面図



側面図

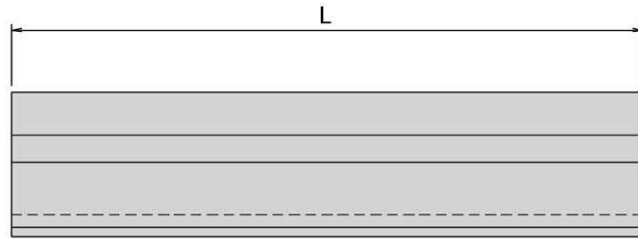

● 諸元表

KT 側溝	呼び名	参考重量(kg)		寸法(mm)												
		L=1000	L=2000	A	B	B'	H	a	b	c	d	d'	e	f	g	t
	300A	210	420	520	360	420	465	300	280	300	50	55	70	70	140	95
	400A	259	519	630	430	510	580	400	370	400	55	55	70	70	140	110
	500A	352	704	750	540	620	705	500	460	500	60	60	80	80	155	125


● 諸元表

道路側溝	呼び名	参考重量(kg)		寸法(mm)												
		L=1000	L=2000	A	B	B'	H	a	b	c	d	d'	e	f	g	t
	250	166	332	460	280	360	405	250	230	250	45	55	65	65	120	90
	300B	235	470	520	320	410	565	300	270	400	50	55	70	70	140	95
	300C	290	580	520	320	420	675	300	260	500	50	55	80	80	140	95
	400B	316	632	630	430	520	690	400	360	500	55	55	80	80	140	110
	500B	424	849	750	550	630	815	500	450	600	60	60	90	90	175	125


側溝蓋(3種)

● 寸法図

平面図



正面図



● 諸元表

呼び名	参考重量(kg)	寸法(mm)		
		B	b	t
250	37	362	352	88
300	45	412	402	93
400	65	512	502	108
500	91	622	612	123


※KT側溝・道路側溝共通

集水蓋(3種)


● 寸法図

【250~400用】

平面図



正面図




● 諸元表

呼び名	参考重量(kg)	寸法(mm)			
		B	b	t	t1
PC-250	23	362	352	90	50
PC-300	25	412	402	95	50
PC-400	33	512	502	110	55
PC-500	43	622	612	125	60


※KT側溝・道路側溝共通

【500用】

平面図




正面図

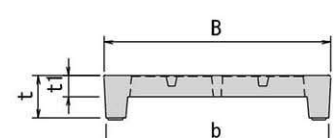



グレーチングタイプ 側溝本体（ボルト固定式）

● 寸法図


正面図

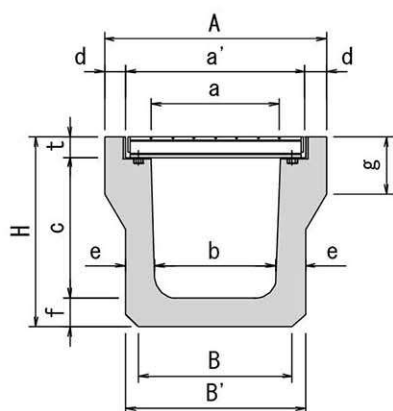


側面図

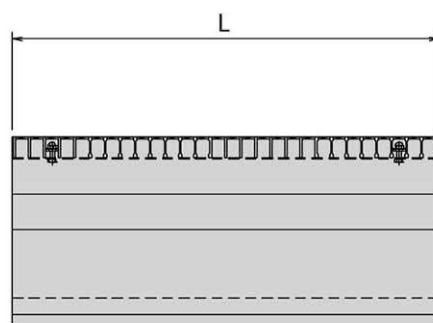

グレーチング平面図



ボルト固定部詳細図

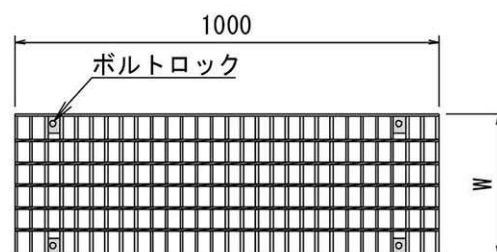

● 諸元表（KT側溝）

呼び名	参考重量(kg)		寸法 (mm)												
	L=1000	L=2000	A	B	B'	H	a	a'	b	c	d	e	f	g	t
300A	220	440	520	360	420	465	300	410	280	340	55	70	70	140	55
400A	270	-	630	430	510	580	400	510	370	445	60	70	70	140	65
500A	364	-	750	540	620	705	500	610	460	550	70	80	80	155	75

● 諸元表（道路側溝）


呼び名	参考重量(kg)		寸法 (mm)												
	L=1000	L=2000	A	B	B'	H	a	a'	b	c	d	e	f	g	t
250	188	376	460	280	360	405	250	360	230	290	50	65	65	120	50
300B	246	-	520	320	410	565	300	410	270	440	55	70	70	140	55
300C	376	-	520	320	420	695	300	410	260	540	55	100	100	140	55
400B	343	-	630	430	520	690	400	510	360	545	60	80	80	140	65
500B	450	-	750	550	630	815	500	610	450	650	70	90	90	175	75




300用 側溝本体（グレーチング付・ボルト固定式）

● 寸法図

正面図

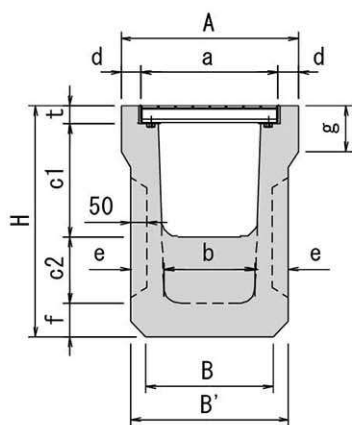

側面図

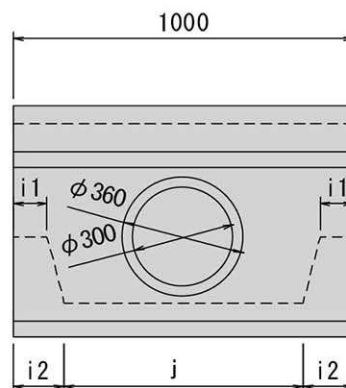


● 諸元表

呼び名	参考重量 (kg)	寸法 (mm)															
		A	B	B'	H	a	b	c1	c2	d	e	f	g	i1	i2	j	t
300	386	520	375	465	695	402	265	340	200	59	100	100	140	100	150	700	55


側溝本体

● 寸法図

正面図

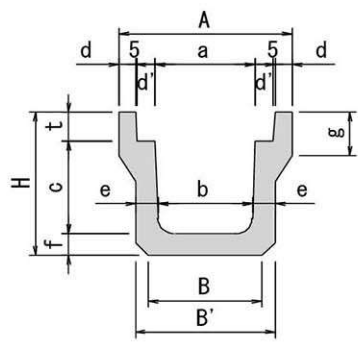

平面図

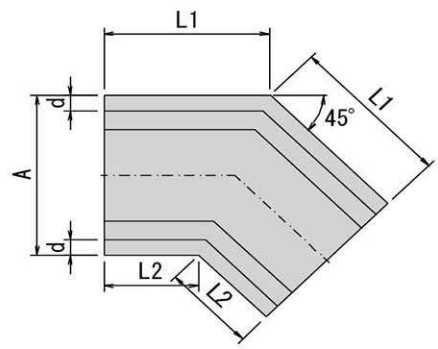


● 諸元表

呼び名	参考重量 (kg)	寸法 (mm)														
		A	B	B'	H	L1	L2	a	b	c	d	d'	e	f	g	t
300×300	163	520	360	420	465	500	285	300	280	300	50	55	70	70	140	95


側溝蓋

● 寸法図

正面図



平面図

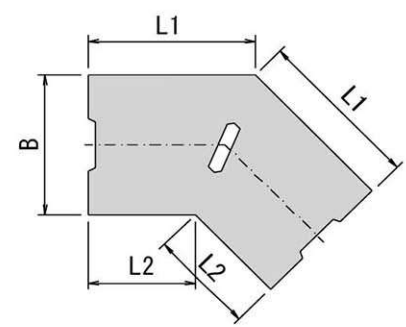


● 諸元表

呼び名	参考重量 (kg)	寸法 (mm)			
		B	L1	L2	t
300用	76	412	478	306	95


グレーチングタイプ (ボルト固定式)

● 寸法図

正面図

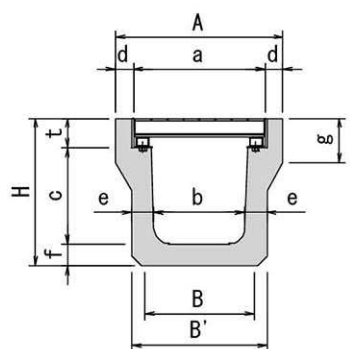

平面図

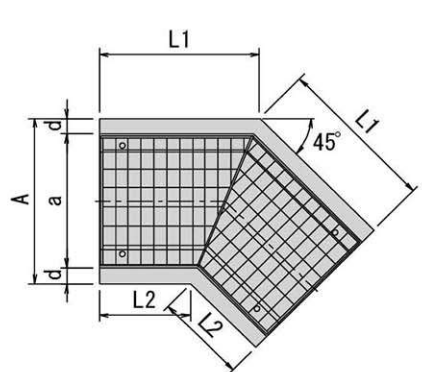

● 諸元表

● 諸 元 表


呼 び 名	参考重量 (kg)	寸 法 (mm)														
		A	B	B'	H	L1	L2	a	b	c	d	e	f	g	t	
300×300	163	520	360	420	465	500	285	410	280	300	55	70	70	140	95	



側溝本体(基本型)

● 寸法図

正面図

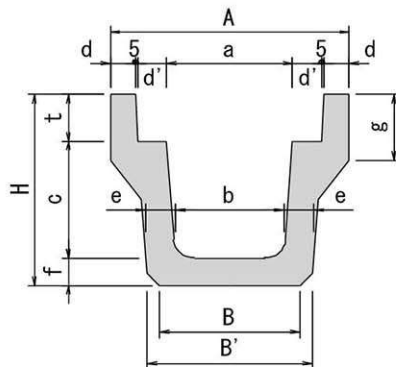

側面図



● 諸元表


呼び名	参考重量(kg)		寸法(mm)												
	L=1000	L=2000	A	H	B	B'	a	b	c	d	d'	e	f	g	t
300 × 300	237	474	570	490	335	395	300	260	300	60	70	70	70	170	120
× 400	269	538	570	590	335	395	300	260	400	60	70	70	70	170	120
× 500	300	602	570	690	335	395	300	260	500	60	70	70	70	170	120
400 × 400	288	576	670	600	436	496	400	360	400	60	70	70	70	180	130
× 500	319	638	670	700	436	496	400	360	500	60	70	70	70	180	130
500 × 500	384	768	770	730	515	595	500	440	500	60	70	80	80	220	150
600 × 600	487	975	870	840	616	716	600	540	600	60	70	90	90	220	150

側溝蓋


● 寸法図

【300用 消音蓋】


平面図




平面図



正面図



正面図



● 諸元表

呼び名	参考重量(kg)	寸法(mm)		
		B	b	t
300	62	440	430	120
400	83	540	530	130
500	114	640	630	150
600	132	740	730	150

● 300用消音蓋重量


呼び名	参考重量(kg)
300	65

集水蓋


● 寸法図

【300~400用】

平面図




正面図




【500~600用】

平面図



正面図



● 諸元表


呼び名	参考重量(kg)	寸法(mm)			
		B	b	t	t1
300	38	440	430	120	60
400	48	540	530	130	65
500	62	640	630	150	75
600	70	740	730	150	75




グレーチングタイプ 側溝本体（ボルト固定式）

● 寸法図


正面図

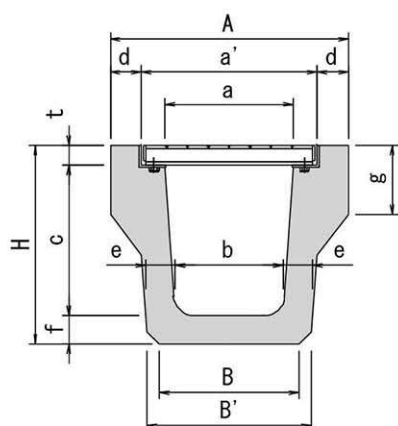


側面図

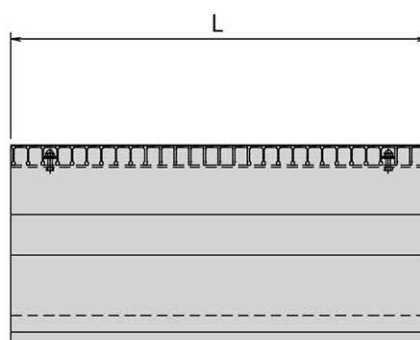

ボルト固定部詳細図



グレーチング平面図

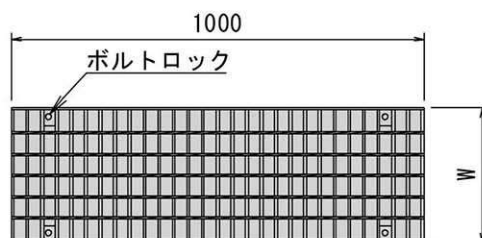

● 諸元表


呼 び 名	参考重量 (kg)		寸 法 (mm)													
	L=1000	L=2000	A	B	B'	H	a	a'	b	c	d	e	f	g	t	
300 × 300	279	558	570	335	395	490	300	410	260	365	80	70	70	170	55	
× 400	310	－	570	335	396	590	300	410	260	465	80	70	70	170	55	
× 500	339	－	570	335	397	690	300	410	260	565	80	70	70	170	55	
400 × 400	331	－	670	436	496	600	400	510	360	465	80	70	70	180	65	
× 500	361	－	670	436	497	700	400	510	360	565	80	70	70	180	65	
500 × 500	424	－	770	515	595	730	500	610	440	575	80	80	80	220	75	
600 × 600	537	－	870	674	733	850	600	710	540	660	80	100	100	220	90	




側溝本体

● 寸法図

正面図

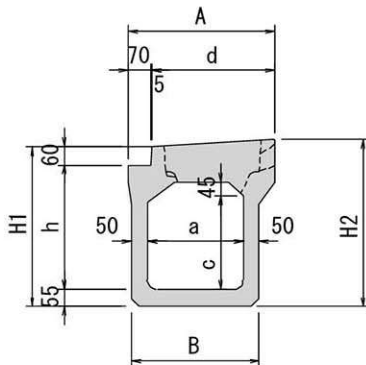

側面図

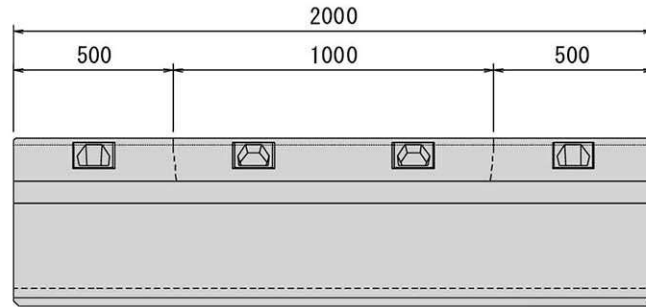


● 諸元表

呼び名	参考重量 (kg)	寸法 (mm)				
a × c		A	B	H1	H2	d
300 × 300	455	460	400	515	538	385

側溝蓋

● 寸法図

平面図




● 諸元表

呼び名	参考重量 (kg)	寸法 (mm)			
		B	b	t1	t2
300	33	297	287	80	98

※ 自由勾配側溝タイプと落蓋側溝タイプの蓋は兼用

正面図







横断溝 本体（グレーチング付・ボルト固定式）

● 寸法図

正面図

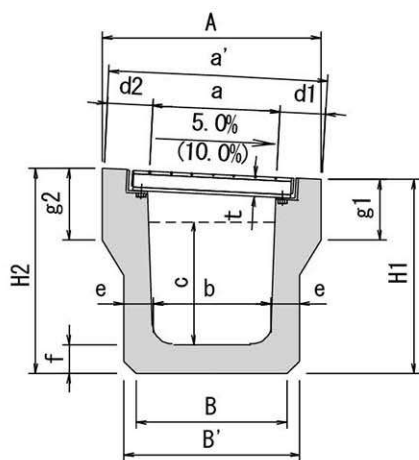

側面図

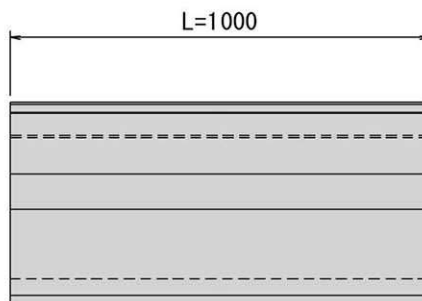


● 諸元表

呼 び 名		参考重量 (kg)	寸 法 (mm)															
			A	B	B'	H1	H2	a	a'	b	c	d1	d2	e	f	g1	g2	t
300	5%	230	520	360	420	474	500	304	521	280	300	109	108	70	70	149	175	60
	10%	235	520	360	420	474	526	306	523	280	300	109	108	70	70	149	201	60
400	5%	280	630	430	510	587	619	405	631	370	400	113	113	70	70	147	179	70
	10%	290	630	430	510	587	650	407	633	370	400	114	112	70	70	147	210	70
500	5%	385	750	540	620	723	761	506	751	460	500	123	122	80	80	173	211	80
	10%	395	750	540	620	723	798	510	754	460	500	123	121	80	80	173	248	80


横断側溝 本体

● 寸法図

正面図

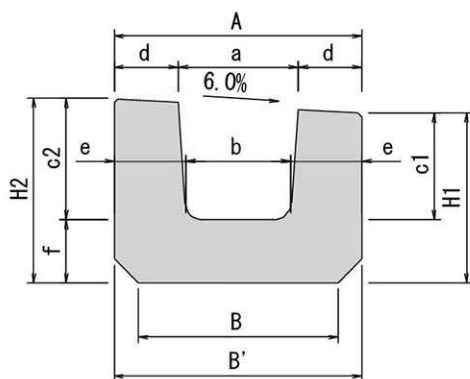

側面図

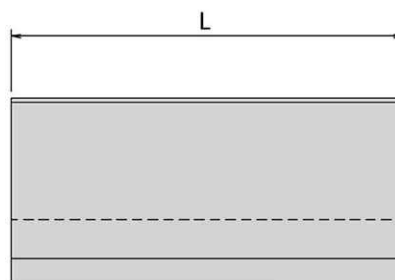


● 諸元表

呼び名	L	参考重量 (kg)	寸法 (mm)											
			A	B	B'	H1	H2	a	b	c1	c2	d	e	f
150	1000	117	310	250	310	216	235	150	130	136	155	80	90	80
	2000	234												
	3000	351												
	4000	469												
	5000	586												
	6000	703												


側溝本体（基本型）

● 寸法図

正面図



側面図

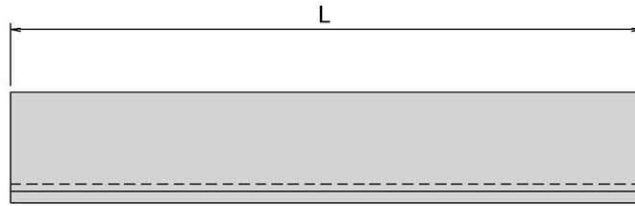

※ T荷重の載荷位置が製品より50cm以上離れている場合はT-25まで対応、ゼロ接近時はT-8まで対応


● 諸元表

呼び名	参考重量(kg)			寸法(mm)									
	L=600	L=1000	L=2000	A	B	B'	H	a	b	c	d	e	f
150	25	42	-	210	160	210	185	150	140	150	30	35	35
180	33	54	-	250	190	250	220	180	170	180	35	40	40
240	56	93	186	330	240	320	290	240	220	240	45	50	50
300A	71	-	-	400	300	378	300	300	260	240	50	60	60
300B	81	133	266	400	300	378	360	300	260	300	50	60	60
300C	93	155	-	400	300	378	425	300	260	360	50	60	65
360A	91	-	-	460	360	438	365	360	310	300	50	65	65
360B	101	168	336	460	360	438	425	360	310	360	50	65	65
450	136	226	452	560	430	539	520	450	400	450	55	70	70
600	210	350	700	740	600	698	680	600	540	600	70	80	80


側溝蓋（耐荷重：1種/群集荷重・2種/縦断T-8）

● 寸法図

平面図



正面図




● 諸元表

種別	呼び名	参考重量(kg)		寸法(mm)			
		L=600	L=1000	B	d	t	t1
1種歩道用	150	8	-	210	35	35	30
	180	14	23	250	40	40	35
	240	21	35	330	50	45	40
	300	37	62	400	55	60	50
	360	40	-	460	55	65	55
	450	54	-	560	60	70	60
	600	77	-	740	75	75	65
2種車道用	150	26	-	210	35	90	80
	180	31	-	250	40	90	80
	240	45	75	330	50	100	85
	300	55	92	400	55	100	85
	360	64	-	460	55	100	85
	450	94	-	560	60	120	100
	600	157	-	740	75	150	130


集水蓋（耐荷重：縦断T-4）

● 寸法図

平面図



正面図



● 諸元表


呼び名	参考重量(kg)	寸法(mm)				
		B	t	t1	d1	d2
240	18	330	40	30	48	48
300	24	400	50	40	50	52




I 型 ソケット付 側溝本体

● 寸法図 (標準型)


正面図(ソケット部)



側面図

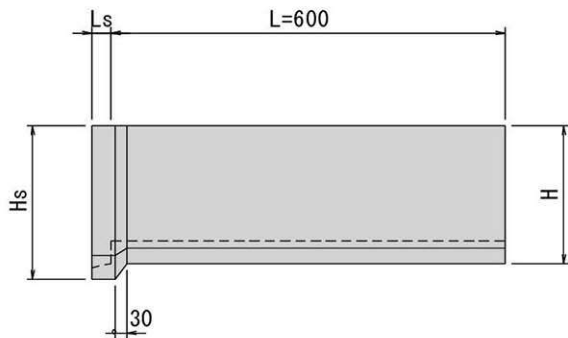


正面図(基本部)




● 寸法図 (滑止付)


正面図(ソケット部)

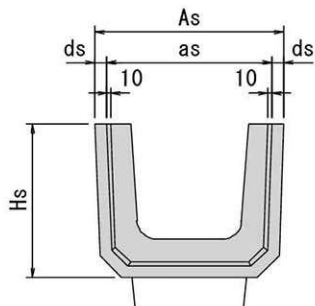

側面図

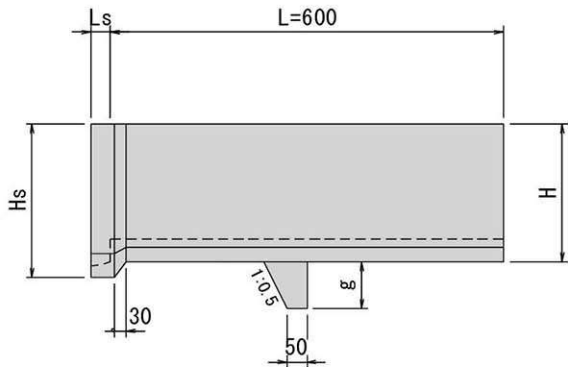

正面図(基本部)

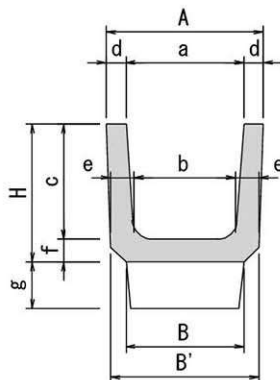


● 諸元表

呼び名	参考重量(kg)		寸法(mm)														
	標準型	滑止付	As	Hs	Ls	as	ds	A	B	B'	H	a	b	c	e	f	g
DV PU240	60	64	400	325	50	350	25	330	240	319	290	240	220	240	50	50	100
DV PU300	85	92	480	400	50	420	30	400	300	378	360	300	260	300	60	60	120


II 型 ソケット付 側溝本体

● 寸法図 (標準型)


正面図(ソケット部)



側面図

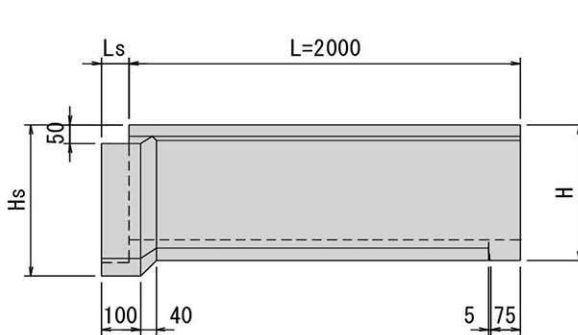

正面図(基本部)

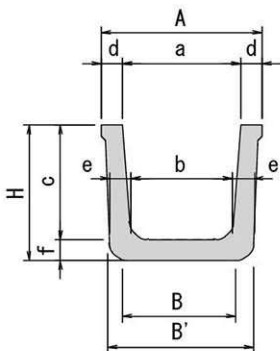


● 諸元表

呼 び 名	参考重量 (kg)	寸 法 (mm)													
		As	Hs	Ls	as	ds	A	B	B'	H	a	b	c	e	f
240	195	404	330	70	350	27	350	240	319	290	240	220	240	50	50
300	254	462	395	70	410	26	410	300	368	355	300	260	300	55	55


側溝本体

● 寸法図

正面図

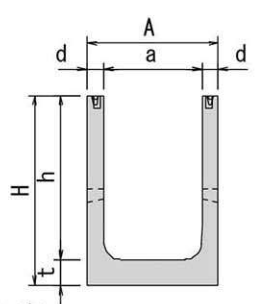

側面図

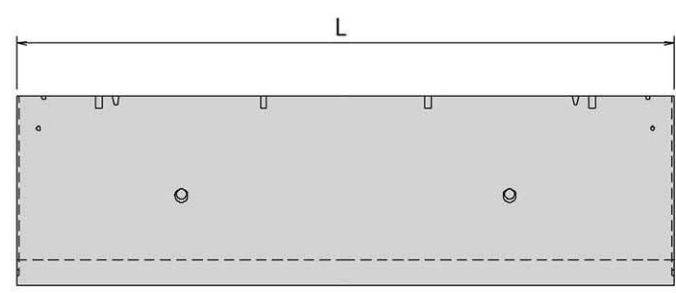

● 諸元表


呼び名	参考重量 (kg)	寸法 (mm)						
		a	h	A	H	d	t	L
250 × 250	260	250	250	350	330	50	80	2000
300 × 300	309	300	300	400	380	50	80	2000
× 400	358	300	400	400	480	50	80	2000
× 500	407	300	500	400	580	50	80	2000
× 600	456	300	600	400	680	50	80	2000
× 700	505	300	700	400	780	50	80	2000
× 800	554	300	800	400	880	50	80	2000

側溝蓋


● 寸法図

N型 (標準型)

平面図

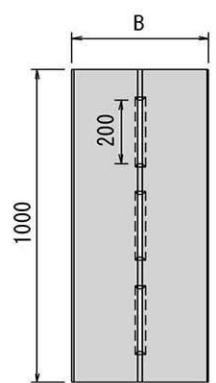


断面図




F型300用(フラット)

平面図

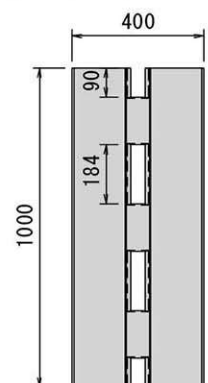


断面図




S型300用(舗装)

平面図

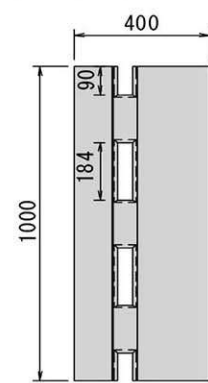


断面図




M型300用(縁石)

平面図

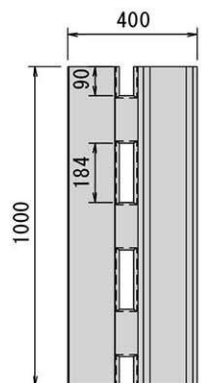

断面図



● 諸元表 (N型)

呼び名	参考重量 (kg)	寸法 (mm)
		B
250	88	350
300	101	400

参考重量 : 91kg

参考重量 : 77kg


参考重量 : 169kg




側溝蓋

● 寸法図


平面図

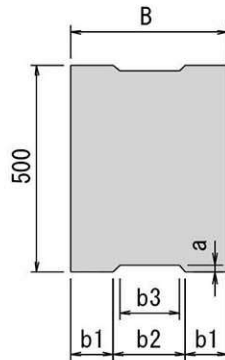

側面図



正面図



● 県 I 型 諸元表

呼び名	参考重量 (kg)	寸 法 (mm)						
		B	b	t	b1	b2	b3	a
250用	38	320	310	100	75	170	140	15
300用	44	370	360	100	100	170	140	15
350用	50	420	410	100	125	170	140	15

● 熊 本 県 型 諸 元 表

呼 び 名		参考重量 (kg)	寸 法 (mm)						
			B	b	t	b1	b2	b3	a
県 型	1	64	430	430	120	130	170	140	20
	2	77	430	430	150	130	170	140	20
	3	76	530	530	120	180	170	140	20

※受注生産

● 熊 本 市 型 諸 元 表

呼 び 名		参考重量 (kg)	寸 法 (mm)						
			B	b	t	b1	b2	b3	a
市 型	1	59	410	410	120	105	200	170	15
	2	73	510	510	120	155	200	170	15

※受注生産

● 国 土 交 通 省 型 諸 元 表

呼 び 名		参考重量 (kg)	寸 法 (mm)						
			B	b	t	b1	b2	b3	a
C-7型	1	53	430	430	100	145	140	100	20
	2	65	530	530	100	195	140	100	20
	3	92	630	630	120	245	140	100	20
C-3型	1	68	430	430	130	145	140	100	20
	2	85	530	530	130	195	140	100	20
	3	118	630	630	150	245	140	100	20
C-2型	1	58	430	430	110	145	140	100	20
	2	78	530	530	120	195	140	100	20
	3	101	630	630	130	245	140	100	20


※受注生産




チェッカード（ボルト固定式）

● 寸法図


平面図

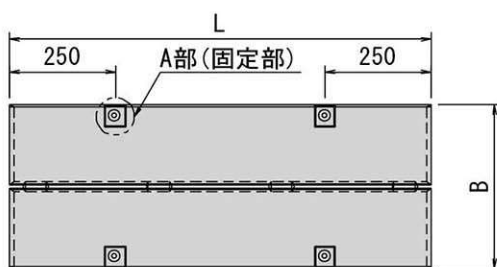

正面図




KS側溝（I型）側面図

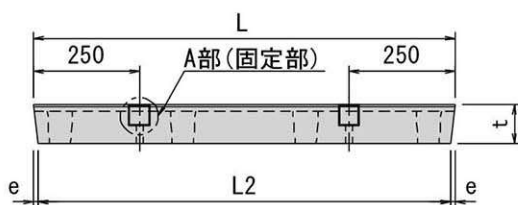


KT側溝・道路側溝（3種）側面図



A部（固定部）詳細図

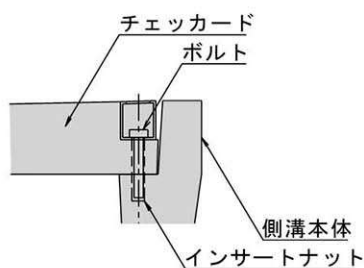

B部（梁部）詳細図




● 諸元表

仕 様	呼 び 名	参考重量 (kg)	寸 法 (mm)						
			B	B2	L	L2	d	e	t
KS側溝 I 型用	300	84	395	385	1000	980	5	10	95
	400	126	495	485	1000	980	5	10	110
	500	172	600	580	1000	980	10	10	125
	600	224	700	680	1000	980	10	10	140
KT側溝 道路側溝 3種用	250	74	362	352	1000	-	5	-	90
	300	90	412	402	1000	-	5	-	95
	400	130	512	502	1000	-	5	-	110
	500	182	622	612	1000	-	5	-	125


鉄筋コンクリートL形

● 寸法図

正面図

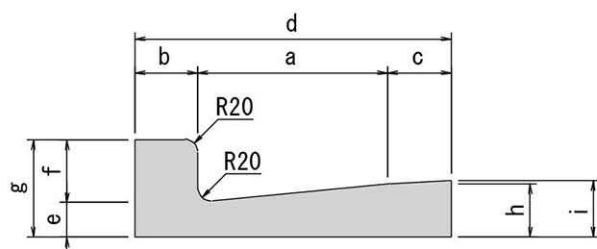

側面図

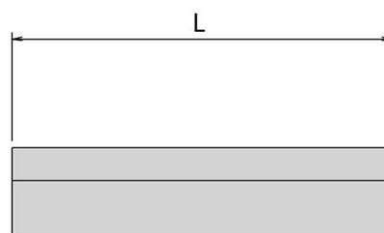

● 諸元表

基本型	呼び名	参考重量 (kg)		寸法 (mm)								
		L=600	L=1000	a	b	c	d	e	f	g	h	i
	250A	47	78	250	100	—	350	55	100	155	80	—
	250B	59	—	250	100	100	450	55	100	155	80	85
	300	65	—	300	100	100	500	55	100	155	85	90
	350	72	—	350	100	100	550	55	100	155	90	95

● 諸元表


乗入型	呼び名	参考重量 (kg)		寸法 (mm)								
		L=600		a	b	c	d	e	f	g	h	i
	250A	40		250	100	—	350	55	50	105	80	—
	250B	52		250	100	100	450	55	50	105	80	85
	300	58		300	100	100	500	55	50	105	85	90
	350(受)	65		350	100	100	550	55	50	105	90	95

※ 切り下げタイプもございます

PL3型


● 寸法図

正面図

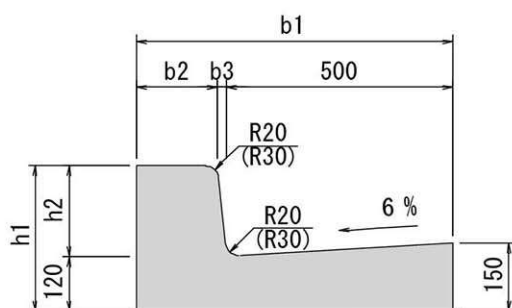

※ () 内はL=2000の場合

側面図

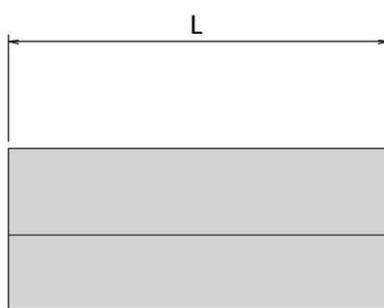

● 諸元表


呼び名	参考重量 (kg)		寸法 (mm)				
	L=600	L=2000	b1	b2	b3	h1	h2
H150	166	553	665	150	15	270	150
H200	194	647	700	180	20	320	200




エプロンブロック

● 寸 法 図


平面图

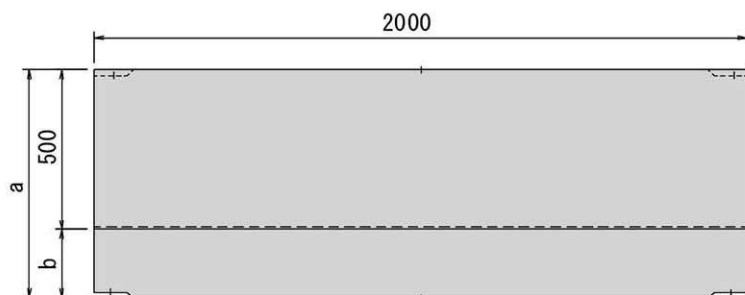

正面图

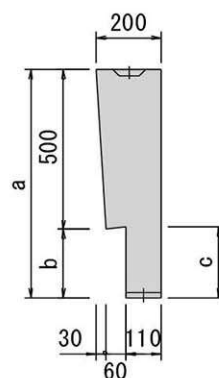

側面図

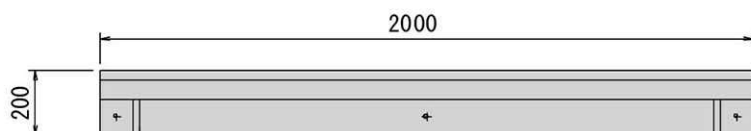


● 諸 元 表

呼 び 名	参考重量 (kg)	寸 法 (mm)		
		a	b	c
Aタイプ	568	715	215	222
Bタイプ	586	750	250	257
Cタイプ	590	755	255	262


V 型側溝

● 寸法図


平面图

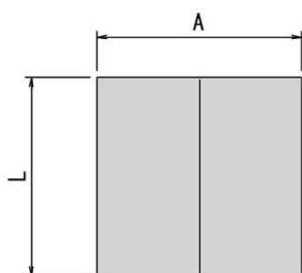

側面図



正面图




● 諸 元 表

呼 び 名	参考重量 (kg)	寸 法 (mm)			
		A	L	h1	h2
500	43	500	500	80	55

血型側溝

● 寸 法 図


平面图

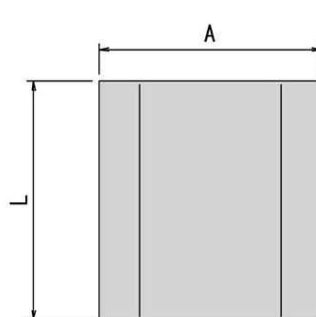

側面図



正面图

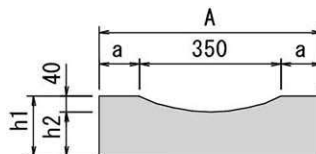

● 諸 元 表

呼 び 名	参考重量 (kg)	寸 法 (mm)				
		A	L	h1	h2	a
110	58	450	600	110	70	50
120	72	550	600	120	80	100
150	96	550	600	150	110	100




側溝本体

● 寸法図

正面図

側面図

A部詳細図

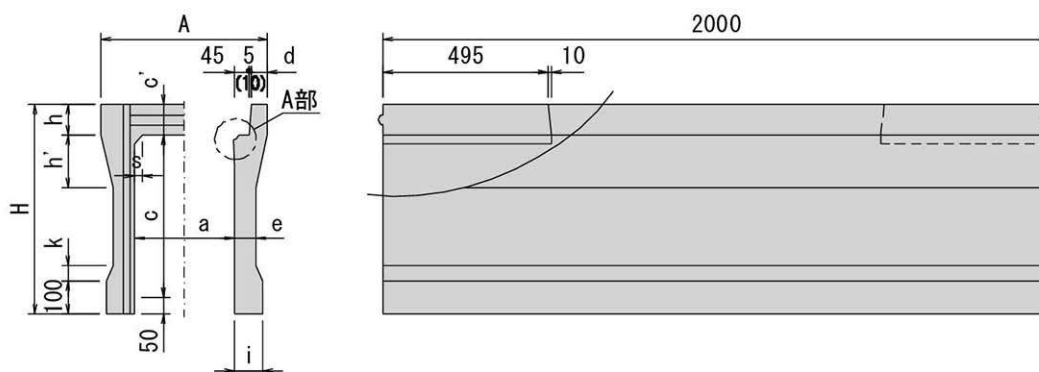

※ () 内の寸法は a寸法が500, 600 サイズ

※ グレーチング付製品の製作可

※ 横断用製品の製作可

● 諸元表


呼び名			参考重量 (kg)	寸 法 (mm)									
a	x	c		A	H	c'	d	e	h	h'	s	i	k
300	x	300	356	500	455	95	50	65	95	160	30	85	50
	x	400	408	500	545	95	50	65	95	160	30	85	50
	x	500	460	500	645	95	50	65	95	160	30	85	50
	x	600	558	500	745	95	50	65	95	160	30	85	50
	x	700	619	500	845	95	50	75	95	170	40	85	50
	x	800	745	500	945	95	50	75	95	170	40	85	50
	x	900	817	500	1045	95	50	75	95	170	40	85	50
	x	1000	977	500	1145	95	50	85	95	180	45	85	-
	x	1100	1056	500	1245	95	50	85	95	180	45	85	-
	x	1200	1135	500	1345	95	50	85	95	180	45	85	-
400	x	400	470	610	560	110	55	60	110	160	40	90	60
	x	500	545	610	660	110	55	60	110	160	40	90	60
	x	600	601	610	760	110	55	60	110	160	40	90	60
	x	700	713	610	860	110	55	70	110	170	45	90	70
	x	800	779	610	960	110	55	70	110	170	45	90	70
	x	900	917	610	1060	110	55	80	110	180	50	90	80
	x	1000	993	610	1160	110	55	80	110	180	50	90	80
	x	1100	1167	610	1260	110	55	90	110	190	55	90	-
	x	1200	1246	610	1360	110	55	90	110	190	55	90	-
	x	1300	1462	720	1475	125	55	95	125	190	65	95	-
500	x	500	658	720	675	125	55	70	125	170	45	95	70
	x	600	724	720	775	125	55	70	125	170	45	95	70
	x	700	790	720	875	125	55	70	125	170	45	95	70
	x	800	856	720	975	125	55	70	125	170	45	95	70
	x	900	1031	720	1075	125	55	85	125	180	55	95	80
	x	1000	1111	720	1175	125	55	85	125	180	55	95	80
	x	1100	1191	720	1275	125	55	85	125	180	55	95	80
	x	1200	1373	720	1375	125	55	95	125	190	65	95	-
	x	1300	1462	720	1475	125	55	95	125	190	65	95	-
	x	1400	1551	720	1575	125	55	95	125	190	65	95	-
600	x	600	832	830	790	140	60	75	140	180	55	100	80
	x	700	902	830	890	140	60	75	140	180	55	100	80
	x	800	972	830	990	140	60	75	140	180	55	100	80
	x	900	1043	830	1090	140	60	75	140	180	55	100	80
	x	1000	1236	830	1190	140	60	90	140	190	65	100	90
	x	1100	1321	830	1290	140	60	90	140	190	65	100	90
	x	1200	1406	830	1390	140	60	90	140	190	65	100	90
	x	1300	1602	830	1490	140	60	100	140	200	75	100	-
	x	1400	1696	830	1590	140	60	100	140	200	75	100	-
	x	1500	1790	830	1690	140	60	100	140	200	75	100	-




排水性舗装対応製品

● 寸法図


正面図




側面図

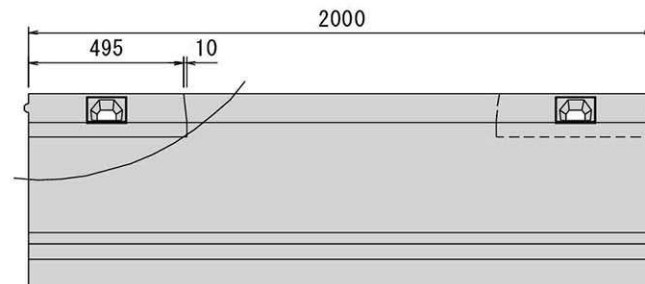

A部 側面図



A部 断面図



- ※ グレーティング付製品の製作可
- ※ 横断用製品の製作可

● 諸元表


呼び名			参考重量 (kg)	寸法 (mm)									
a	x	c		A	H	c'	d	e	h	h'	s	i	k
300	x	300	356	500	445	95	50	65	95	160	30	85	50
	x	400	408	500	545	95	50	65	95	160	30	85	50
	x	500	460	500	645	95	50	65	95	160	30	85	50
	x	600	558	500	745	95	50	65	95	160	30	85	50
	x	700	619	500	845	95	50	75	95	170	40	85	50
	x	800	745	500	945	95	50	75	95	170	40	85	50
	x	900	817	500	1045	95	50	75	95	170	40	85	50
	x	1000	977	500	1145	95	50	85	95	180	45	85	-
	x	1100	1056	500	1245	95	50	85	95	180	45	85	-
	x	1200	1135	500	1345	95	50	85	95	180	45	85	-
400	x	400	470	610	560	110	55	60	110	160	40	90	60
	x	500	545	610	660	110	55	60	110	160	40	90	60
	x	600	601	610	760	110	55	60	110	160	40	90	60
	x	700	713	610	860	110	55	70	110	170	45	90	70
	x	800	779	610	960	110	55	70	110	170	45	90	70
	x	900	917	610	1060	110	55	80	110	180	50	90	80
	x	1000	993	610	1160	110	55	80	110	180	50	90	80
	x	1100	1167	610	1260	110	55	90	110	190	55	90	-
	x	1200	1246	610	1360	110	55	90	110	190	55	90	-
	x	1300	1462	720	1475	125	55	95	125	190	65	95	-
500	x	500	658	720	675	125	55	70	125	170	45	95	70
	x	600	724	720	775	125	55	70	125	170	45	95	70
	x	700	790	720	875	125	55	70	125	170	45	95	70
	x	800	856	720	975	125	55	70	125	170	45	95	70
	x	900	1031	720	1075	125	55	85	125	180	55	95	80
	x	1000	1111	720	1175	125	55	85	125	180	55	95	80
	x	1100	1191	720	1275	125	55	85	125	180	55	95	80
	x	1200	1373	720	1375	125	55	95	125	190	65	95	-
	x	1300	1462	720	1475	125	55	95	125	190	65	95	-
	x	1400	1551	720	1575	125	55	95	125	190	65	95	-
600	x	600	934	830	790	140	60	75	140	180	55	100	80
	x	700	902	830	890	140	60	75	140	180	55	100	80
	x	800	972	830	990	140	60	75	140	180	55	100	80
	x	900	1043	830	1090	140	60	75	140	180	55	100	80
	x	1000	1236	830	1190	140	60	90	140	190	65	100	90
	x	1100	1321	830	1290	140	60	90	140	190	65	100	90
	x	1200	1406	830	1390	140	60	90	140	190	65	100	90
	x	1300	1602	830	1490	140	60	100	140	200	75	100	-
	x	1400	1696	830	1590	140	60	100	140	200	75	100	-
	x	1500	1790	830	1690	140	60	100	140	200	75	100	-




側溝本体

● 寸法図

正面図

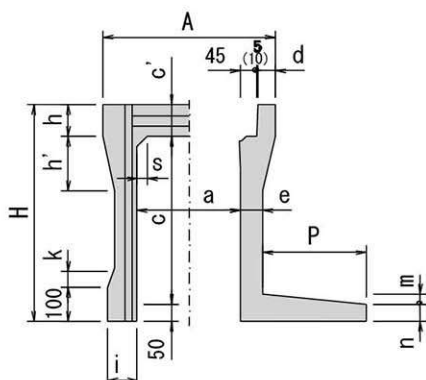

側面図

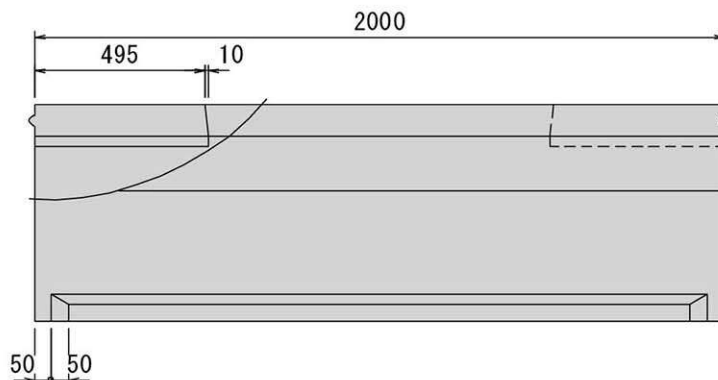

※ () 内の寸法は a寸法が500, 600 サイズ

※ グレーチング付製品の製作可

● 諸元表


呼び名			参考重量 (kg)	寸 法 (mm)												
a	x	c		A	H	c'	d	e	h	h'	s	i	k	P	m	n
300	x	300	425	500	445	95	50	65	95	160	30	85	50	300	30	50
	x	400	537	500	545	95	50	65	95	160	30	85	50	300	30	50
	x	500	589	500	645	95	50	65	95	160	30	85	50	300	30	50
	x	600	654	500	745	95	50	65	95	160	30	85	50	300	30	50
	x	700	752	500	845	95	50	75	95	170	40	85	50	400	40	50
	x	800	882	500	945	95	50	75	95	170	40	85	50	400	40	50
	x	900	995	500	1045	95	50	75	95	170	40	85	50	500	50	50
	x	1000	1130	500	1145	95	50	85	95	180	45	85	-	500	50	50
	x	1100	1210	500	1245	95	50	85	95	180	45	85	-	500	50	50
	x	1200	1290	500	1345	95	50	85	95	180	45	85	-	600	60	50
400	x	400	558	610	560	110	55	60	110	160	40	90	60	300	30	50
	x	500	630	610	660	110	55	60	110	160	40	90	60	300	30	50
	x	600	686	610	760	110	55	60	110	160	40	90	60	300	30	50
	x	700	845	610	860	110	55	70	110	170	45	90	70	400	40	50
	x	800	910	610	960	110	55	70	110	170	45	90	70	400	40	50
	x	900	1054	610	1060	110	55	80	110	180	50	90	80	400	40	50
	x	1000	1171	610	1160	110	55	80	110	180	50	90	80	500	50	50
	x	1100	1340	610	1260	110	55	90	110	190	55	90	-	500	50	50
	x	1200	1472	610	1360	110	55	90	110	190	55	90	-	600	60	50
	x	1300	1678	720	1475	125	55	95	125	190	65	95	-	600	60	50
500	x	500	738	720	675	125	55	70	125	170	45	95	70	300	30	50
	x	600	804	720	775	125	55	70	125	170	45	95	70	300	30	50
	x	700	907	720	875	125	55	70	125	170	45	95	70	400	40	50
	x	800	973	720	975	125	55	70	125	170	45	95	70	400	40	50
	x	900	1155	720	1075	125	55	85	125	180	55	95	80	400	40	50
	x	1000	1276	720	1175	125	55	85	125	180	55	95	80	500	50	50
	x	1100	1356	720	1275	125	55	85	125	180	55	95	80	500	50	50
	x	1200	1543	720	1375	125	55	95	125	190	65	95	-	500	50	50
	x	1300	1678	720	1475	125	55	95	125	190	65	95	-	600	60	50
	x	1400	1767	720	1575	125	55	95	125	190	65	95	-	600	60	50
600	x	600	911	830	790	140	60	75	140	180	55	100	80	300	30	50
	x	700	981	830	890	140	60	75	140	180	55	100	80	300	30	50
	x	800	1088	830	990	140	60	75	140	180	55	100	80	400	40	50
	x	900	1159	830	1090	140	60	75	140	180	55	100	80	400	40	50
	x	1000	1359	830	1190	140	60	90	140	190	65	100	90	400	40	50
	x	1100	1486	830	1290	140	60	90	140	190	65	100	90	500	50	50
	x	1200	1570	830	1390	140	60	90	140	190	65	100	90	500	50	50
	x	1300	1816	830	1490	140	60	100	140	200	75	100	-	600	60	50
	x	1400	1910	830	1590	140	60	100	140	200	75	100	-	600	60	50
	x	1500	2004	830	1690	140	60	100	140	200	75	100	-	600	60	50




側溝本体

● 寸法図


正面図

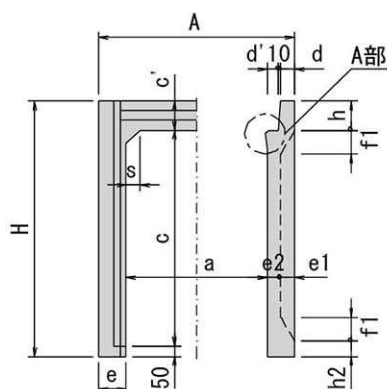

側面図

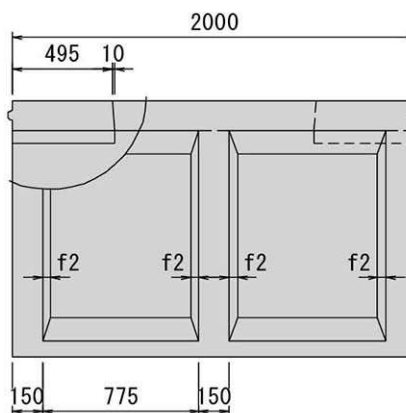

A部詳細図



- ※ グレーチング付製品の製作可
- ※ 横断用製品の製作可

● 諸元表


呼 び 名			参考重量 (kg)	寸 法 (mm)												
a	x	c		A	H	c'	d	d'	e	e1	e2	f1	f2	h1	h2	s
700	x	700	1070	970	900	150	70	55	135	70	65	120	40	150	80	70
	x	800	1147		1000											
	x	900	1225		1100											
	x	1000	1303		1200											
	x	1100	1380		1300											
	x	1200	1458		1400											
	x	1300	1540		1500											
	x	1400	1618		1600											
	x	1500	1696		1700											
	x	1600	1773		1800											
	x	1700	1851		1900											
800	x	800	1262	1080	1010	160	75	55	140	70	70	120	40	160	80	80
	x	900	1344		1110											
	x	1000	1427		1210											
	x	1100	1509		1310											
	x	1200	1591		1410											
	x	1300	1674		1510											
	x	1400	1761		1610											
	x	1500	1843		1710											
	x	1600	1925		1810											
	x	1700	2008		1910											
	x	1800	2090		2010											
x	1900	2172	2110													
900	x	900	1466	1190	1120	170	75	60	145	70	75	120	40	170	80	90
	x	1000	1533		1220											
	x	1100	1640		1320											
	x	1200	1727		1420											
	x	1300	1814		1520											
	x	1400	1901		1620											
	x	1500	1993		1720											
	x	1600	2080		1820											
	x	1700	2167		1920											
	x	1800	2254		2020											
	x	1900	2341		2120											
1000	x	1000	1688	1300	1230	180	80	60	150	70	80	120	40	180	80	100
	x	1100	1780		1330											
	x	1200	1872		1430											
	x	1300	1963		1530											
	x	1400	2055		1630											
	x	1500	2147		1730											
	x	1600	2244		1830											
	x	1700	2335		1930											
	x	1800	2427		2030											
	x	1900	2519		2130											
	x	2000	2610		2230											




側溝本体

● 寸法図

正面図

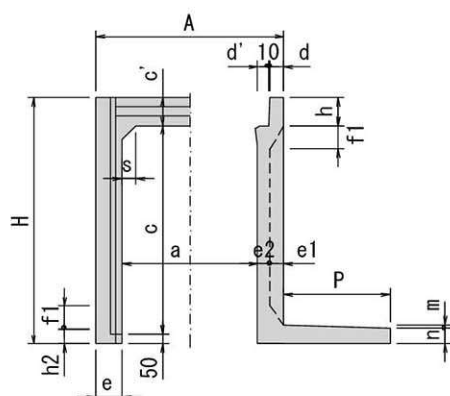

側面図

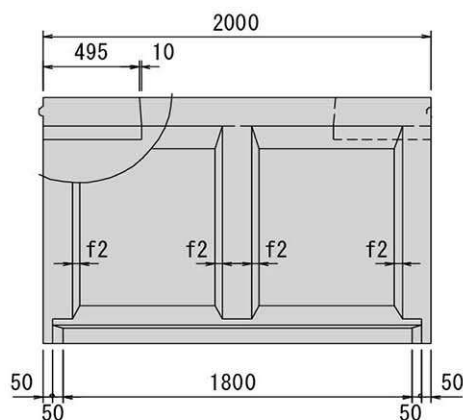

※ グレーティング付製品の製作可

● 諸元表


呼び名			参考重量 (kg)	寸法 (mm)														
a	x	c		A	H	c'	d	d'	e	e1	e2	f1	f2	h1	h2	m	n	p
700	x	700	1298	970	900	150	70	55	135	70	65	120	40	150	80	14	86	400
	x	800	1375	970	1000	150	70	55	135	70	65	120	40	150	80	14	86	400
	x	900	1486	970	1100	150	70	55	135	70	65	120	40	150	80	15	85	450
	x	1000	1591	970	1200	150	70	55	135	70	65	120	40	150	80	17	83	500
	x	1100	1696	970	1300	150	70	55	135	70	65	120	40	150	80	19	80	550
	x	1200	1807	970	1400	150	70	55	135	70	65	120	40	150	80	21	79	600
	x	1300	1931	970	1500	150	70	55	135	70	65	120	40	150	80	24	76	700
	x	1400	2032	970	1600	150	70	55	135	70	65	120	40	150	80	26	74	750
	x	1500	2138	970	1700	150	70	55	135	70	65	120	40	150	80	28	72	800
	x	1600	2243	970	1800	150	70	55	135	70	65	120	40	150	80	29	71	850
800	x	1700	2348	970	1900	150	70	55	135	70	65	120	40	150	80	31	69	900
	x	800	1490	1080	1010	160	75	55	140	70	70	120	40	160	80	14	86	400
	x	900	1605	1080	1110	160	75	55	140	70	70	120	40	160	80	15	85	450
	x	1000	1715	1080	1210	160	75	55	140	70	70	120	40	160	80	17	83	500
	x	1100	1825	1080	1310	160	75	55	140	70	70	120	40	160	80	19	81	550
	x	1200	1940	1080	1410	160	75	55	140	70	70	120	40	160	80	21	79	600
	x	1300	2065	1080	1510	160	75	55	140	70	70	120	40	160	80	24	76	700
	x	1400	2175	1080	1610	160	75	55	140	70	70	120	40	160	80	26	74	750
	x	1500	2285	1080	1710	160	75	55	140	70	70	120	40	160	80	28	72	800
	x	1600	2395	1080	1810	160	75	55	140	70	70	120	40	160	80	29	71	850
900	x	1700	2505	1080	1910	160	75	55	140	70	70	120	40	160	80	31	69	900
	x	1800	2625	1080	2010	160	75	55	140	70	70	120	40	160	80	35	65	1000
	x	900	1727	1190	1120	170	75	60	145	70	75	120	40	170	80	15	85	450
	x	1000	1821	1190	1220	170	75	60	145	70	75	120	40	170	80	17	83	500
	x	1100	1956	1190	1320	170	75	60	145	70	75	120	40	170	80	19	81	550
	x	1200	2076	1190	1420	170	75	60	145	70	75	120	40	170	80	21	79	600
	x	1300	2205	1190	1520	170	75	60	145	70	75	120	40	170	80	24	76	700
	x	1400	2315	1190	1620	170	75	60	145	70	75	120	40	170	80	26	74	750
	x	1500	2435	1190	1720	170	75	60	145	70	75	120	40	170	80	28	72	800
	x	1600	2550	1190	1820	170	75	60	145	70	75	120	40	170	80	29	71	850
1000	x	1700	2664	1190	1920	170	75	60	145	70	75	120	40	170	80	31	69	900
	x	1800	2789	1190	2020	170	75	60	145	70	75	120	40	170	80	33	67	950
	x	1900	2876	1190	2120	170	75	60	145	70	75	120	40	170	80	35	65	1000
	x	1000	1976	1300	1230	180	80	60	150	70	80	120	40	180	80	17	83	500
	x	1100	2096	1300	1330	180	80	60	150	70	80	120	40	180	80	19	81	550
	x	1200	2221	1300	1430	180	80	60	150	70	80	120	40	180	80	21	79	600
	x	1300	2354	1300	1530	180	80	60	150	70	80	120	40	180	80	24	76	700
	x	1400	2470	1300	1630	180	80	60	150	70	80	120	40	180	80	26	74	750
	x	1500	2589	1300	1730	180	80	60	150	70	80	120	40	180	80	28	72	800
	x	1600	2714	1300	1830	180	80	60	150	70	80	120	40	180	80	29	71	850




側溝蓋 (T-25)

● 寸法図

平面図



正面図




● 諸元表


呼 び 名		参考重量 (kg)	寸 法 (mm)		
			B	b	t
I 型	300	42	395	385	93
	400	63	495	485	108
	500	86	600	580	123
	600	112	700	680	138
大型	700	137	820	800	148
	800	165	920	900	158
	900	196	1030	1010	168
	1000	228	1130	1110	178

● 寸法図

平面図

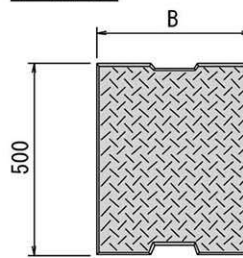

正面図



● 諸元表


呼 び 名		参考重量 (kg)	寸 法 (mm)			
			B	b	t	t1
I 型	300	31	395	385	95	55
	400	45	495	485	110	65
	500	59	600	580	125	70
	600	76	700	680	140	80
大型	700	89	820	800	150	85
	800	106	920	900	160	90
	900	125	1030	1010	170	95
	1000	144	1130	1110	180	100

集水蓋 (T-25)


● 寸法図

【300~400サイズ】

平面図




正面図




【500~600サイズ】

平面図




正面図

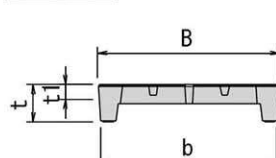


【700~1000サイズ】

平面図



正面図

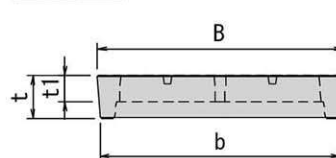

● 諸元表


呼 び 名		参考重量 (kg)	寸 法 (mm)			
			B	b	t	t1
I 型	300	25	395	385	95	50
	400	33	495	485	110	60
	500	43	600	580	125	65
	600	52	700	680	140	70
大型	700	74	820	800	150	90
	800	93	920	900	160	90
	900	111	1030	1010	170	100
	1000	122	1130	1110	180	105




側溝本体

● 寸法図

正面図

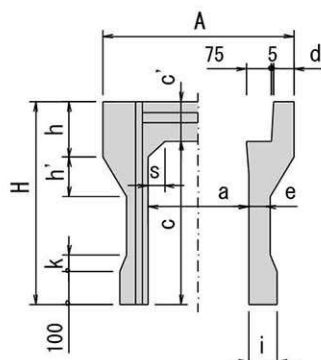

側面図

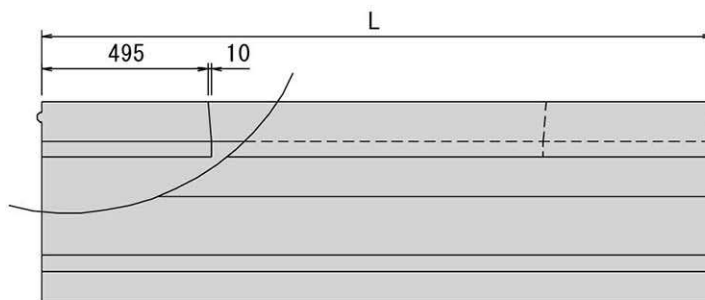

※ グレーチング付製品の製作可
※ 横断用製品の製作可

● 諸元表


呼び名			参考重量 (kg)	寸法 (mm)									
a	x	c		A	H	c'	d	e	h	h'	i	k	s
300	x	400	545	570	520	120	60	65	170	120	85	50	50
	x	500	614		620								
	x	600	683		720								
	x	700	752		820								
	x	800	821		920								
	x	900	890		1020								
	x	1000	959		1120								
	x	1100	1028		1220								
	x	1200	1097		1320								
400	x	500	659	670	630	130	60	70	170	120	90	50	50
	x	600	733		730								
	x	700	806		830								
	x	800	879		930								
	x	900	952		1030								
	x	1000	1026		1130								
	x	1100	1100		1230								
	x	1200	1174		1330								
	x	1300	1248		1430								
500	x	600	851	770	750	150	60	75	200	120	95	50	70
	x	700	929		850								
	x	800	1006		950								
	x	900	1084		1050								
	x	1000	1161		1150								
	x	1100	1239		1250								
	x	1200	1317		1350								
	x	1300	1395		1450								
	x	1400	1473		1550								
600	x	600	918	870	750	150	60	100	200	120	100	-	75
	x	700	1008		850								
	x	800	1082		950								
	x	900	1164		1050								
	x	1000	1246		1150								
	x	1100	1327		1250								
	x	1200	1409		1350								
	x	1300	1491		1450								
	x	1400	1573		1550								
	x	1500	1655		1650								




側溝本体

● 寸法図

正面図

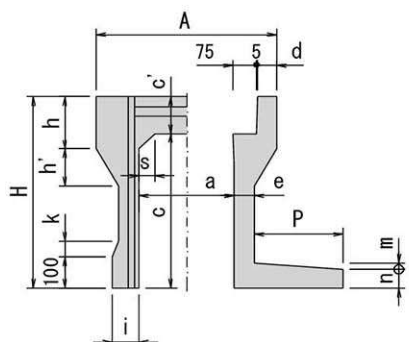

側面図

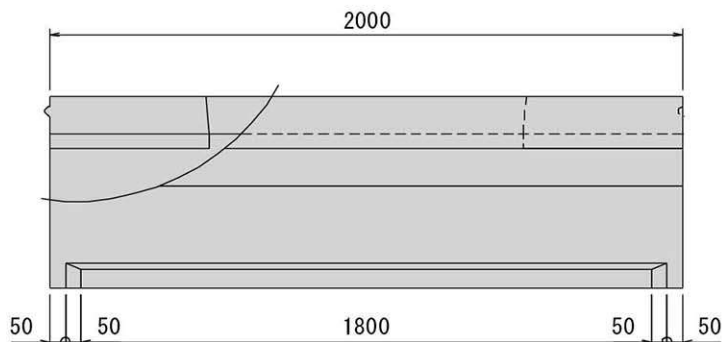

※ グレーチング付製品の製作可

● 諸元表


呼び名			参考重量 (kg)	寸法 (mm)												
a	x	c		A	H	c'	d	e	h	h'	i	k	m	n	p	s
300	x	400	595	570	520	120	60	65	170	120	85	50	20	60	280	50
	x	500	664	570	620	120	60	65	170	120	85	50	20	60	280	50
	x	600	733	570	720	120	60	65	170	120	85	50	20	60	280	50
	x	700	802	570	820	120	60	65	170	120	85	50	20	60	280	50
	x	800	871	570	920	120	60	65	170	120	85	50	20	60	280	50
	x	900	949	570	1020	120	60	65	170	120	85	50	20	60	330	50
	x	1000	1044	570	1120	120	60	65	170	120	85	50	20	60	480	50
	x	1100	1113	570	1220	120	60	65	170	120	85	50	20	60	480	50
400	x	1200	1182	570	1320	120	60	65	170	120	85	50	20	60	480	50
	x	500	709	670	630	130	60	70	170	120	90	50	20	60	285	50
	x	600	783	670	730	130	60	70	170	120	90	50	20	60	285	50
	x	700	856	670	830	130	60	70	170	120	90	50	20	60	285	50
	x	800	929	670	930	130	60	70	170	120	90	50	20	60	285	50
	x	900	1010	670	1030	130	60	70	170	120	90	50	20	60	335	50
	x	1000	1093	670	1130	130	60	70	170	120	90	50	20	60	385	50
	x	1100	1176	670	1230	130	60	70	170	120	90	50	20	60	435	50
500	x	1200	1259	670	1330	130	60	70	170	120	90	50	20	60	485	50
	x	1300	1333	670	1430	130	60	70	170	120	90	50	20	60	485	50
	x	600	913	770	750	150	60	75	200	120	95	50	30	70	280	70
	x	700	991	770	850	150	60	75	200	120	95	50	30	70	280	70
	x	800	1079	770	950	150	60	75	200	120	95	50	30	70	330	70
	x	900	1157	770	1050	150	60	75	200	120	95	50	30	70	330	70
	x	1000	1256	770	1150	150	60	75	200	120	95	50	30	70	430	70
	x	1100	1345	770	1250	150	60	75	200	120	95	50	30	70	480	70
600	x	1200	1428	770	1350	150	60	75	200	120	95	50	30	70	500	70
	x	1300	1506	770	1450	150	60	75	200	120	95	50	30	70	500	70
	x	1400	1595	770	1550	150	60	75	200	120	95	50	30	70	550	70
	x	600	991	870	750	150	60	100	200	120	100	-	30	70	330	75
	x	700	1081	870	850	150	60	100	200	120	100	-	30	70	330	75
	x	800	1155	870	950	150	60	100	200	120	100	-	30	70	330	75
	x	900	1270	870	1050	150	60	100	200	120	100	-	30	70	480	75
	x	1000	1352	870	1150	150	60	100	200	120	100	-	30	70	480	75
	x	1100	1427	870	1250	150	60	100	200	120	100	-	30	70	500	75
	x	1200	1510	870	1350	150	60	100	200	120	100	-	30	70	500	75
	x	1300	1602	870	1450	150	60	100	200	120	100	-	30	70	500	75
	x	1400	1695	870	1550	150	60	100	200	120	100	-	30	70	550	75
	x	1500	1788	870	1650	150	60	100	200	120	100	-	30	70	600	75




側溝本体

● 寸法図

正面図

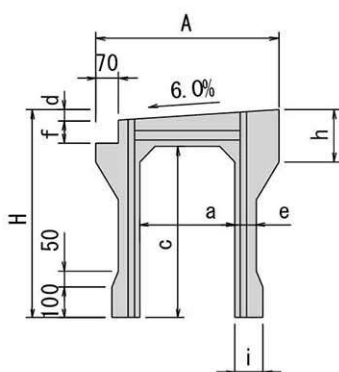

側面図

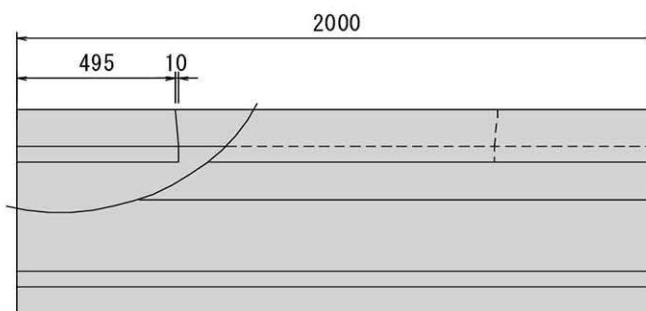

※ グレーチング付製品の製作可

● 諸元表


呼 び 名			参考重量 (kg)	寸 法 (mm)							
				A	H	a	c	d	e	f	h
300	×	300	464	570	470	300	350	34	65	74	170
	×	400	535	570	570	300	450	34	65	74	170
	×	500	602	570	670	300	550	34	65	74	170
	×	600	671	570	770	300	650	34	65	74	170
	×	700	740	570	870	300	750	34	65	74	170
	×	800	809	570	970	300	850	34	65	74	170
	×	900	878	570	1070	300	950	34	65	74	170
	×	1000	947	570	1170	300	1050	34	65	74	170
	×	1100	1016	570	1270	300	1150	34	65	74	170
	×	1200	1085	570	1370	300	1250	34	65	74	170
400	×	400	574	670	580	400	450	32	70	82	170
	×	500	640	670	680	400	550	32	70	82	170
	×	600	708	670	780	400	650	32	70	82	170
	×	700	775	670	880	400	750	32	70	82	170
	×	800	842	670	980	400	850	32	70	82	170
	×	900	910	670	1080	400	950	32	70	82	170
	×	1000	977	670	1180	400	1050	32	70	82	170
	500	×	500	769	770	700	500	550	34	75	74
×		600	841	770	800	500	650	34	75	74	200
×		700	919	770	900	500	750	34	75	74	200
×		800	996	770	1000	500	850	34	75	74	200




Ⅱ型・Ⅱ型ウォール用 側溝蓋

●寸法図

平面図



正面図




●諸元表

呼び名	参考重量 (kg)	寸法 (mm)		
		B	b	t
300	62	440	430	120
400	83	540	530	130
500	114	640	630	150
600	132	740	730	150


Ⅱ型スロープ用 側溝蓋

●寸法図

平面図



正面図

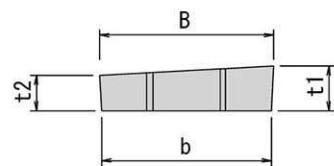

●諸元表

呼び名	参考重量 (kg)	寸法 (mm)			
		B	b	t1	t2
300	55	440	430	115	90
400	72	540	530	128	95
500	100	640	630	147	116


※ スロープ用集水蓋はグレーティングでの対応となります。

Ⅱ型・Ⅱ型ウォール用 集水蓋


●寸法図

【300～400サイズ】

平面図

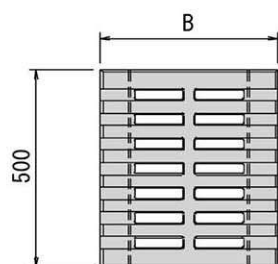


正面図




【500～600サイズ】

平面図

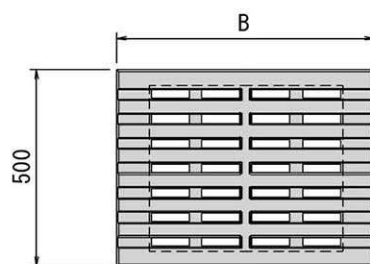

正面図

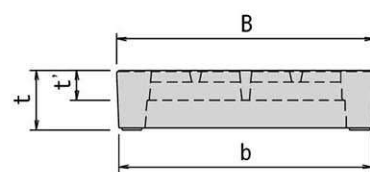

●諸元表


呼び名	参考重量 (kg)	寸法 (mm)			
		B	b	t	t'
300	38	440	430	120	60
400	48	540	530	130	65
500	62	640	630	150	75
600	70	740	730	150	75




側溝本体

● 寸法図

正面図

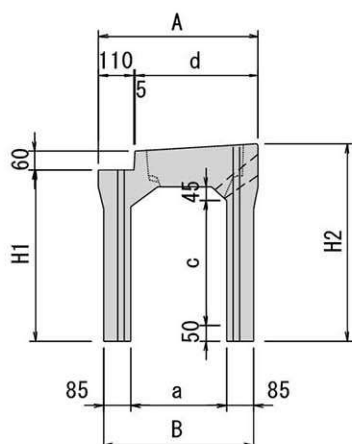

側面図

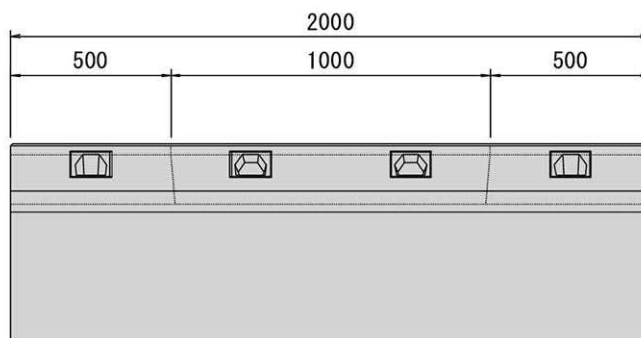


● 諸元表

呼び名	参考重量 (kg)	寸 法 (mm)				
a × c		A	B	H1	H2	d
300 × 300	522	500	470	450	533	385
× 400	604	500	470	550	633	385
× 500	686	500	470	650	733	385
× 600	768	500	470	750	833	385
× 700	850	500	470	850	933	385
× 800	932	500	470	950	1033	385
× 900	1014	500	470	1050	1133	385
× 1000	1096	500	470	1150	1233	385
× 1100	1178	500	470	1250	1333	385
× 1200	1260	500	470	1350	1433	385


側溝蓋

● 寸法図

平面図



正面図



● 諸元表

呼び名	参考重量 (kg)	寸 法 (mm)			
		B	b	t1	t2
300	33	297	287	80	98

※ 自由勾配側溝タイプと落蓋側溝タイプの蓋は兼用




【Cドレーンは頂版プレセット製品】

- (1) 製品は工場で頂版を仮設固定し、上面閉塞のスリット付き門型側溝として現場に納入されます。
- (2) プレセット頂版は粘着シートのみで止めてあり頂版の一時取り外しや片開きが容易にできます。


側溝本体

● 寸法図


正面図

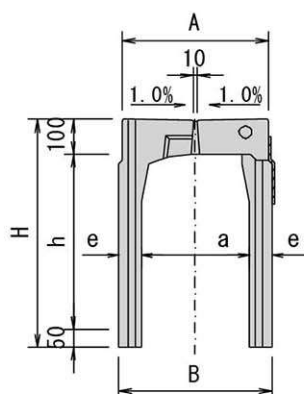

側面図

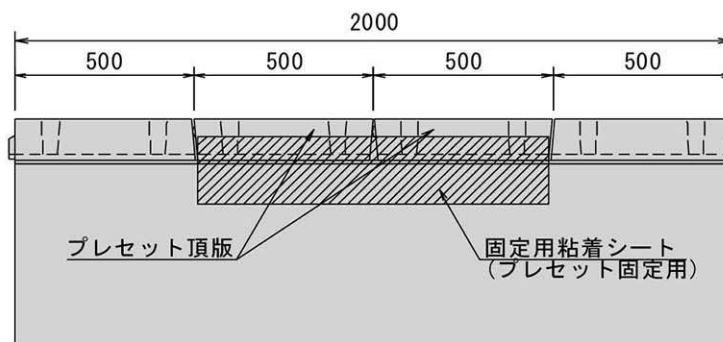

平面図

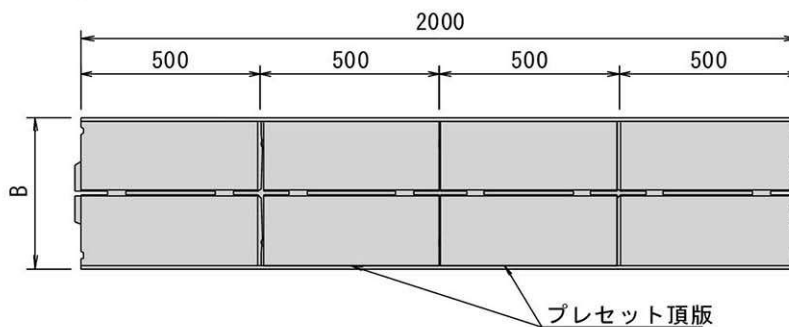

● 諸元表


呼び名	参考重量 (kg)	寸法 (mm)					
		A	B	H	a	h	e
300 × 300	424	410	430	450	300	300	65
× 400	486	410	430	550	300	400	65
× 500	548	410	430	650	300	500	65
× 600	610	410	430	750	300	600	65
× 700	742	410	450	850	300	700	75
× 800	814	410	450	950	300	800	75
× 900	886	410	450	1050	300	900	75
× 1000	1058	410	470	1150	300	1000	85
× 1100	1139	410	470	1250	300	1100	85
× 1200	1220	410	470	1350	300	1200	85




プレセット頂版

- 寸法図 参考重量：49kg


平面図



側面図

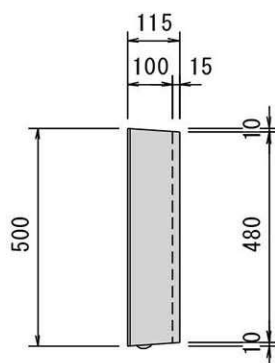


正面図

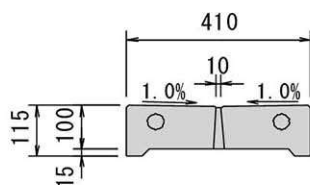


可変フレーム

- 寸法図 参考重量：276kg

正面図

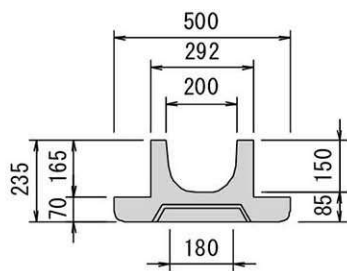

側面図

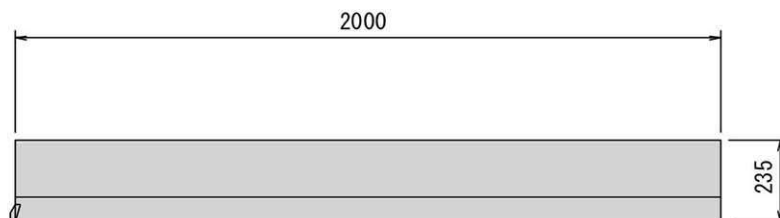

平面図

